

DURA-TUFF® **5.5'X7.5' FARROWING CRATE**

SWINE FLOORING SYSTEMS

FLOORING


- 3 - 18"X24" NEW DURA-TUFF PLASTIC
- 1 - 18"X18" DURA-TUFF PLASTIC
- 3 - 24"X24" DURA-TUFF PLASTIC
- 1 - 24"X18" DURA-TUFF PLASTIC
- 1 - 24"X42" DURA-TUFF INTERLOCKING FLAT OR RAISED DUCTILE IRON
- 1 - 24"X48" DURA-TUFF INTERLOCKING FLAT OR RAISED DUCTILE IRON

HARDWARE

- 2 - 3/16"X2"X22" GALVANIZED STEEL STABILIZER BAR
- 4 - 3/8"X6" STAINLESS STEEL J-BOLTS WITH NYLOCK NUTS & FLAT WASHERS
(3/8"X7" WHEN USING RAISED DUCTILE IRON FLOOR)

SUPPORT BEAMS

- 3 - 1/4"X5"X7.5' FIBERGLASS BEAMS PER CRATE (PLUS 1 PER ROW)
- 2 - CLOSED END PLASTIC BEAM MOUNTING PLATES PER BEAM

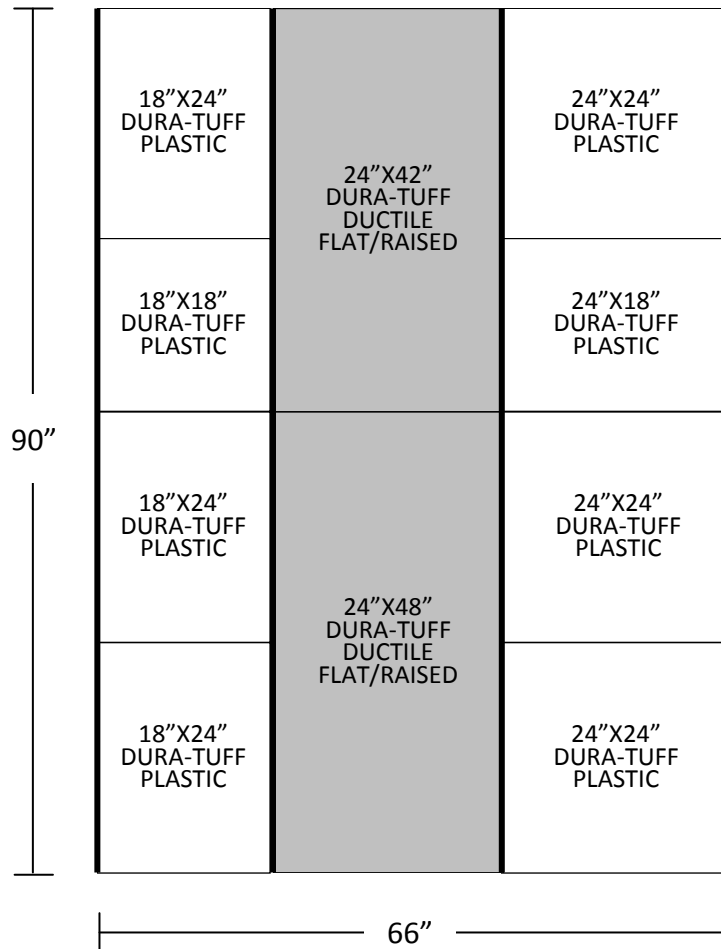

1-800-288-9748 • www.swapinc.com • info@swapinc.com

16400 Midway Rd. Dallas, TX 75001 • P.O. Box 700008 Dallas, TX 75370-0008 • Ph. 972-735-8866 Fx. 972-735-8896